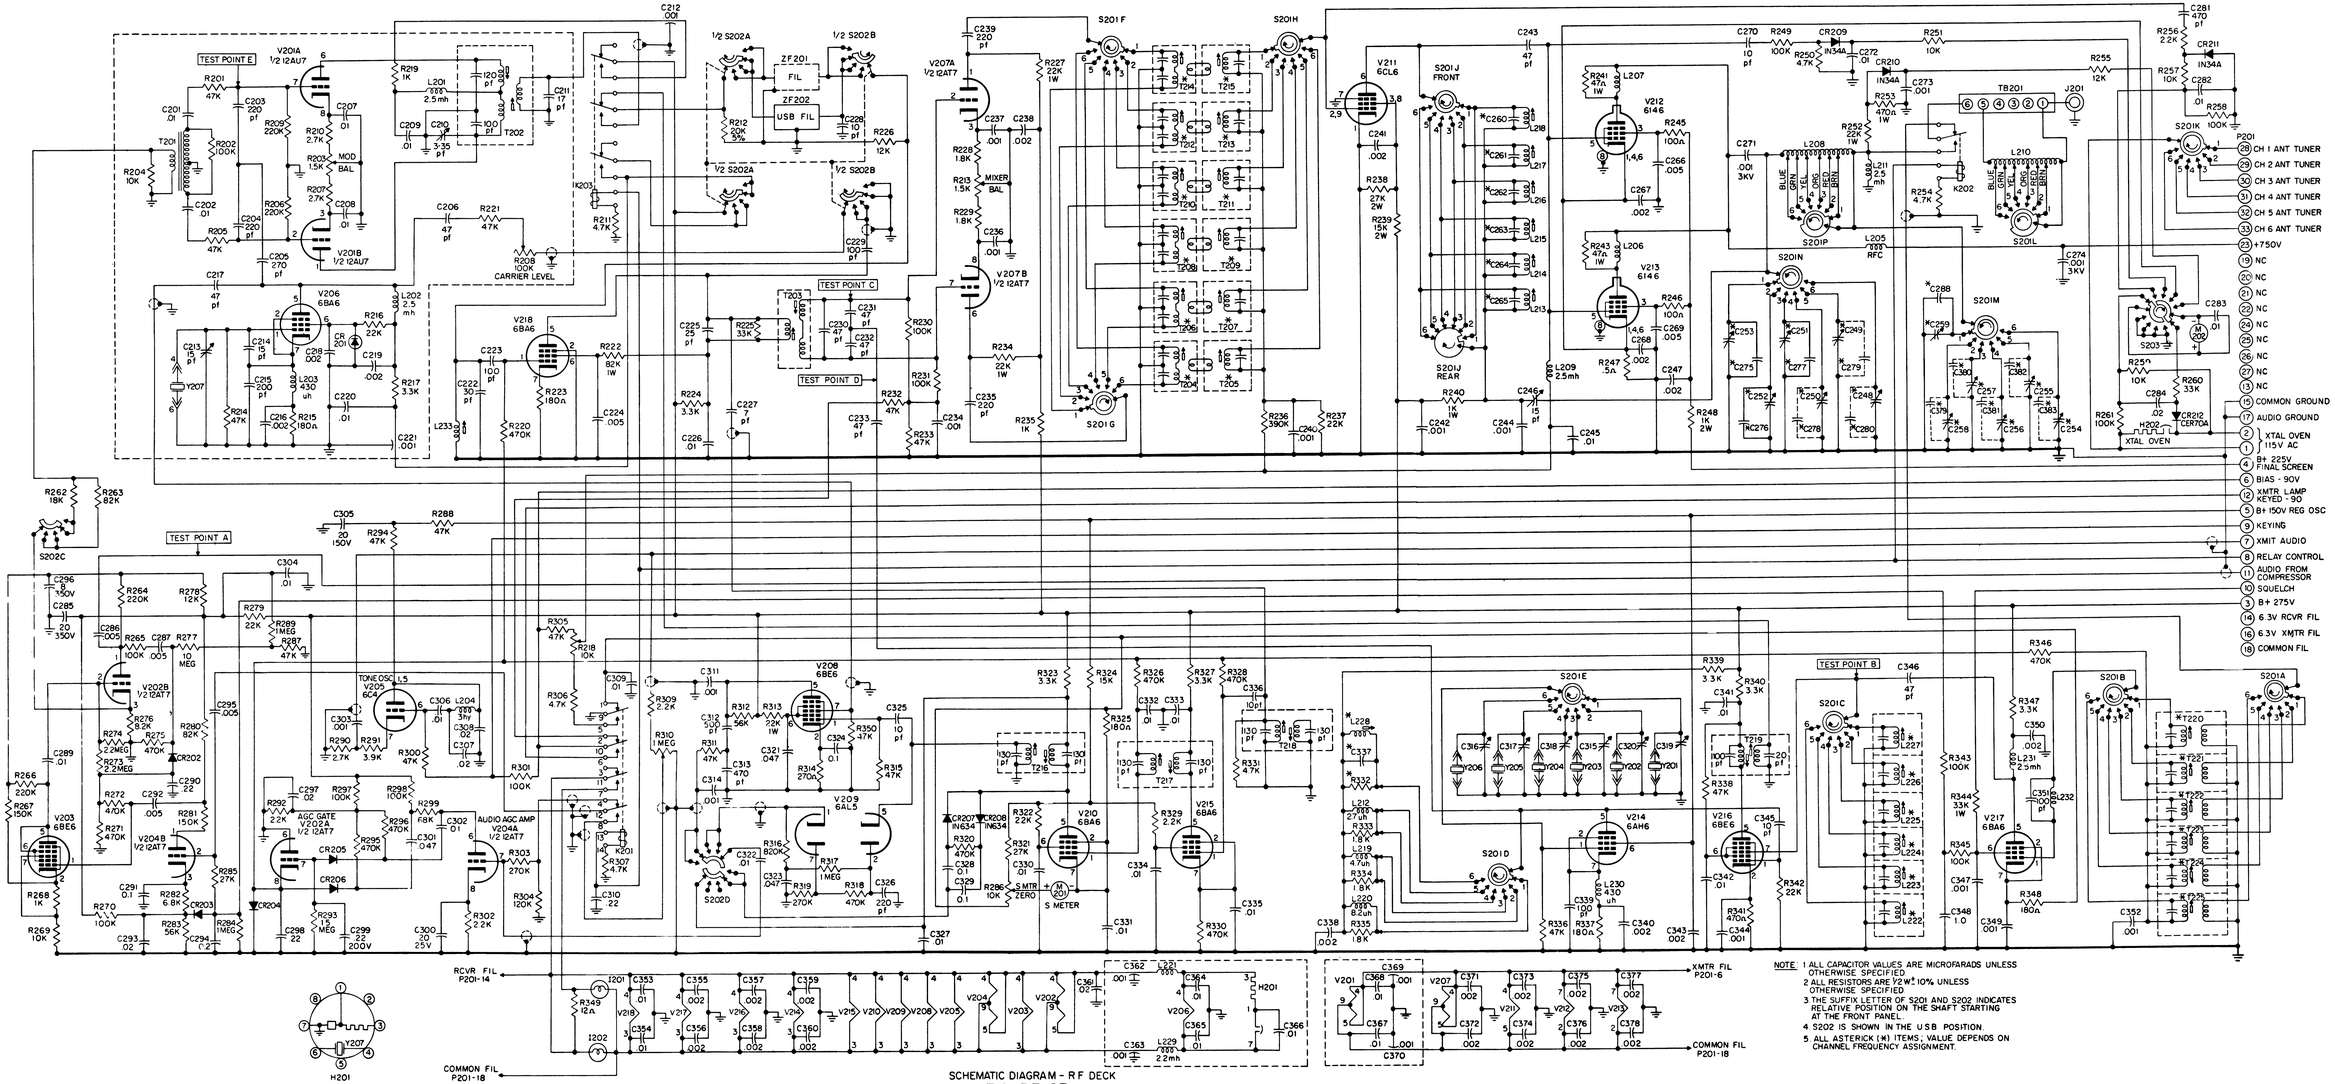

NOTE: 1 ALL CAPACITOR VALUES ARE MICROFARADS UNLESS OTHERWISE SPECIFIED.
2 ALL RESISTORS ARE 1/2W ± 10% UNLESS OTHERWISE SPECIFIED.
3 THE SUFFIX LETTER OF S201 AND S202 INDICATES RELATIVE POSITION ON THE SHAFT STARTING AT THE FRONT PANEL.
4 S202 IS SHOWN IN THE USB POSITION.
5 ALL ASTERICK (*) ITEMS; VALUE DEPENDS ON CHANNEL FREQUENCY ASSIGNMENT.

SCHEMATIC DIAGRAM - RF DECK

FIGURE 23