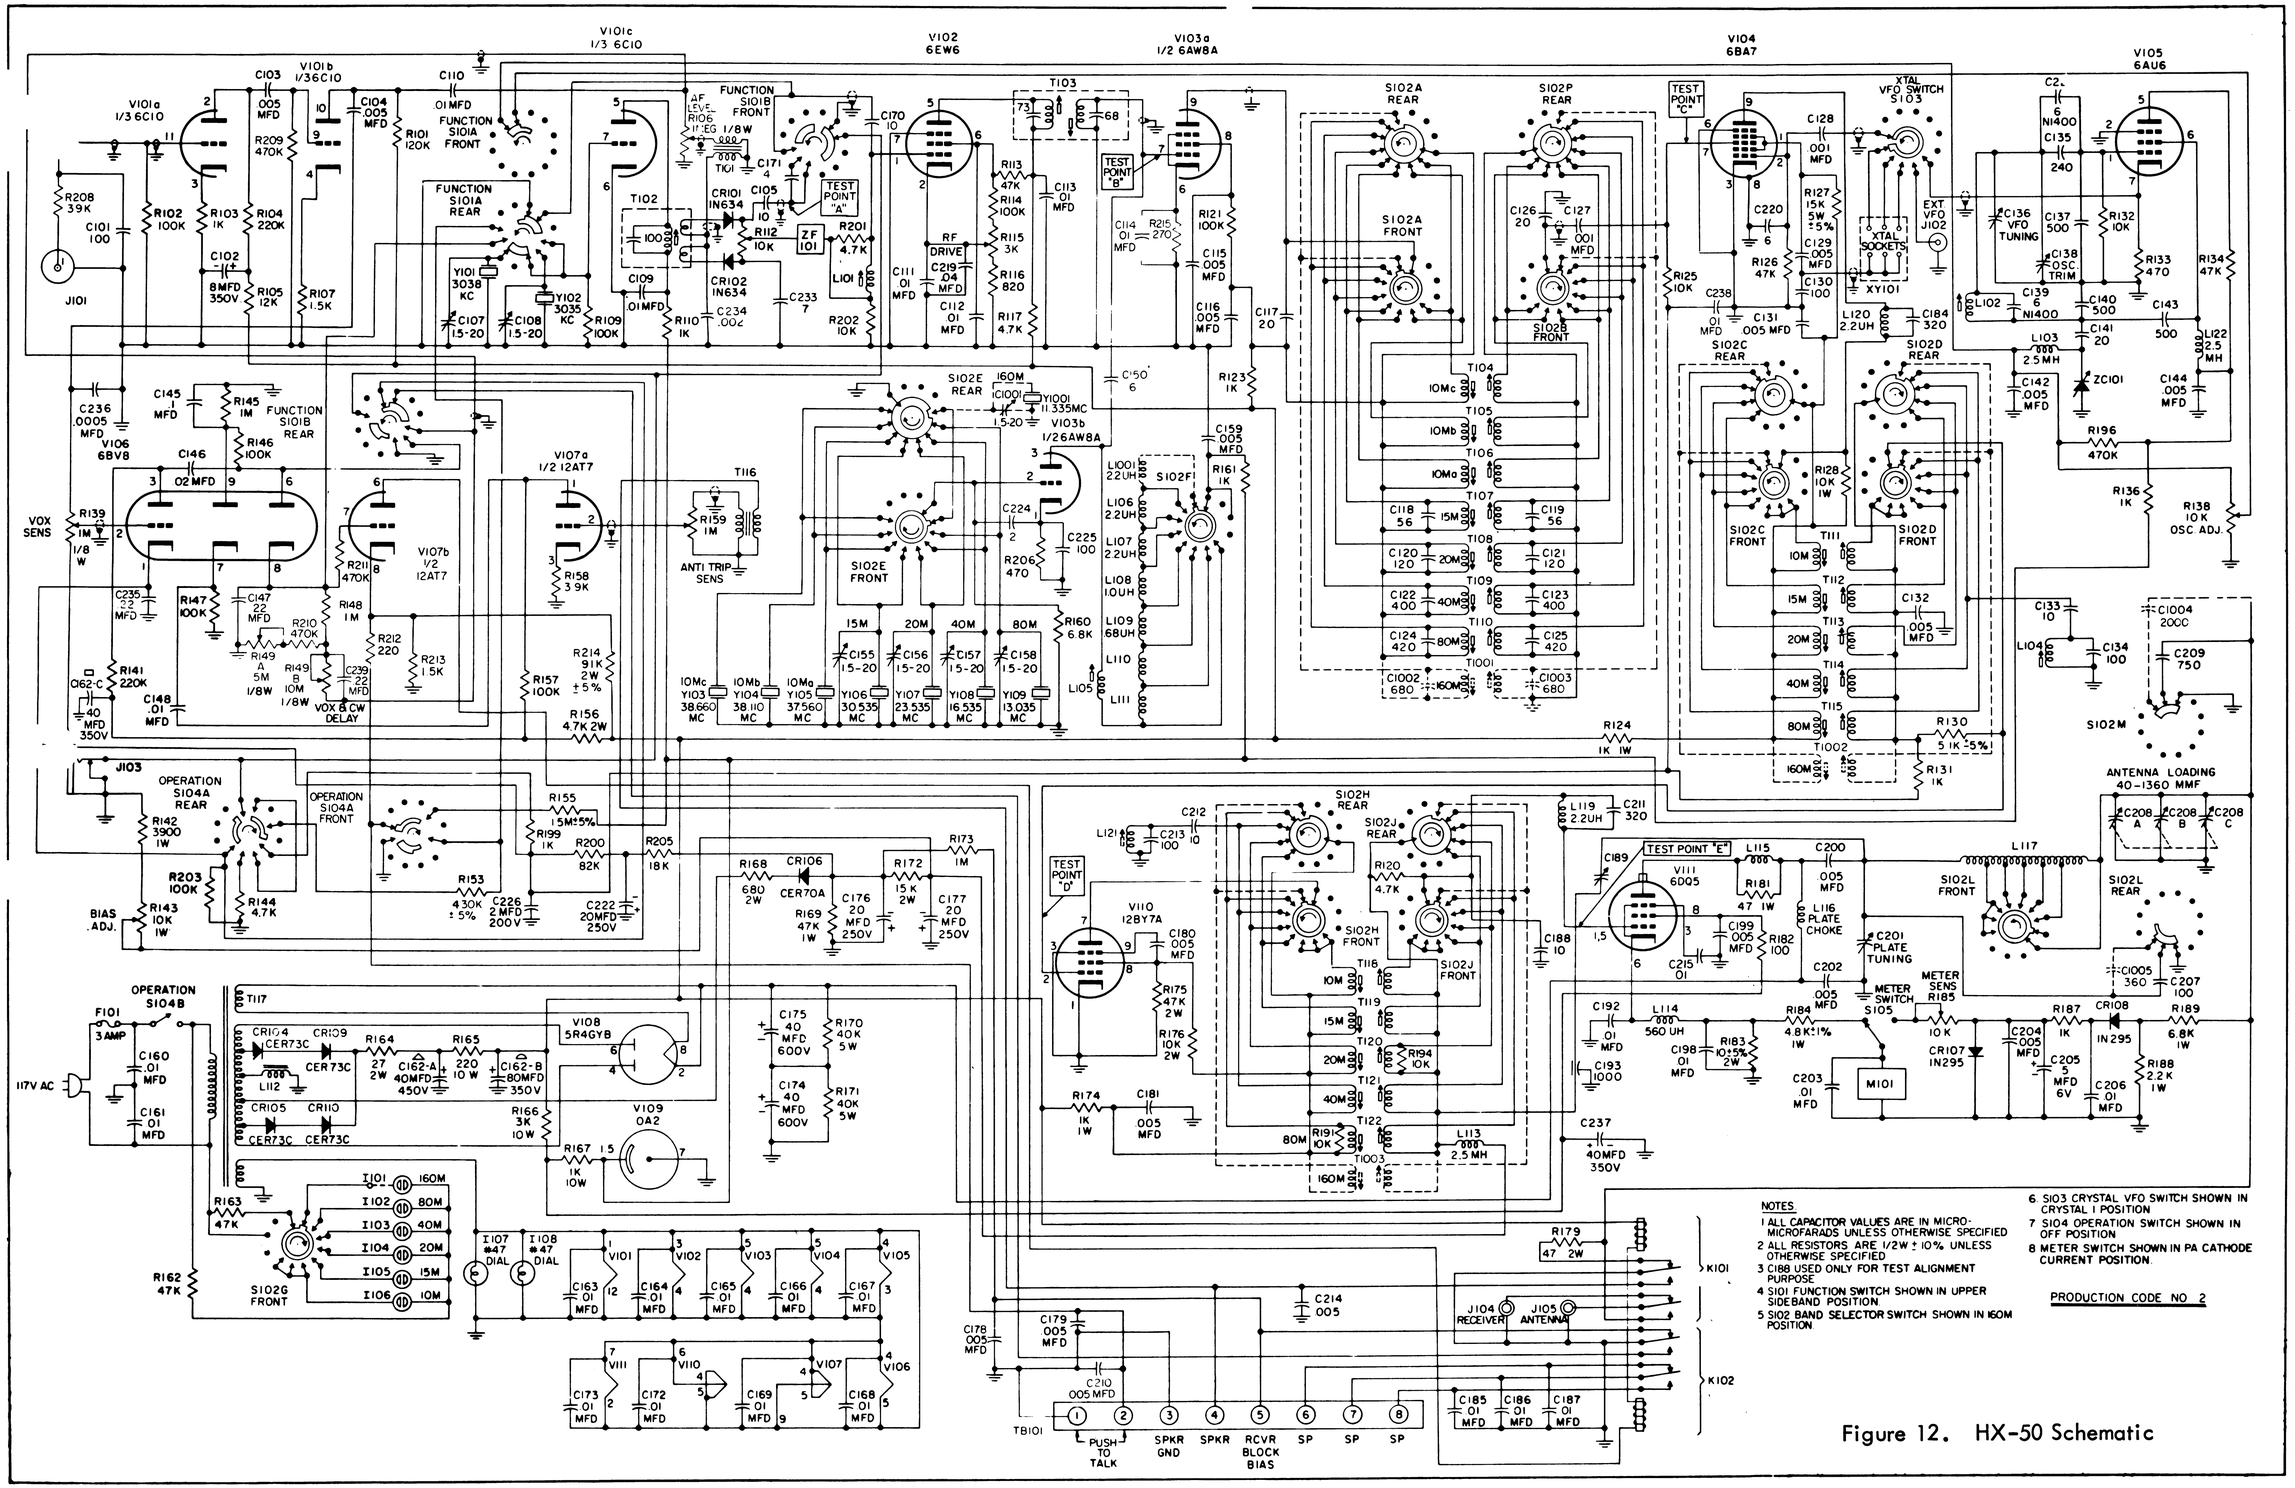

NOTES

1 ALL CAPACITOR VALUES ARE IN MICRO-MICROFARADS UNLESS OTHERWISE SPECIFIED
2 ALL RESISTORS ARE 1/2W ± 10% UNLESS OTHERWISE SPECIFIED
3 C188 USED ONLY FOR TEST ALIGNMENT PURPOSE
4 S101 FUNCTION SWITCH SHOWN IN UPPER SIDEBAND POSITION
5 S102 BAND SELECTOR SWITCH SHOWN IN 160M POSITION
6 S103 CRYSTAL VFO SWITCH SHOWN IN CRYSTAL 1 POSITION
7 S104 OPERATION SWITCH SHOWN IN OFF POSITION
8 METER SWITCH SHOWN IN PA CATHODE CURRENT POSITION

PRODUCTION CODE NO 2

Figure 12. HX-50 Schematic